


American Standard (ANSI) Poly-V Belts

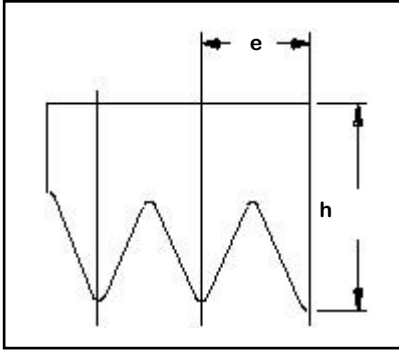

SECTION	e inch	h inch
J	0.092	0.157
L	0.185	0.394

Ametric® Poly-V Belts
- Moderately oil-resistant
- Resistant to temperatures from -30 to 80° C
- Suitable for tropical climates

Ordering Example:
110 J 4
110----- Nominal Pitch
Length (Inch x 10)
J----- Section
280----- Number of Ribs

Note:
Sections H, K and M
Also Available.

Section J	
Part No.	Length inch
110 J	11
130 J	13
140 J	14
143 J	14.3
150 J	15
160 J	16
163 J	16.3
170 J	17
180 J	18
190 J	19
200 J	20
220 J	22
225 J	22.5
230 J	23
240 J	24
260 J	26
270 J	27
280 J	28
285 J	28.5
290 J	29
300 J	30
320 J	32
329 J	32.9
330 J	33
340 J	34
350 J	35
360 J	36
376 J	37.6
380 J	38
390 J	39
400 J	40
415 J	41.5

Section J	
Part No.	Length inch
430 J	43
433 J	43.3
435 J	43.5
437 J	43.7
442 J	44.2
445 J	44.5
450 J	45
453 J	45.3
460 J	46
467 J	46.7
470 J	47
472 J	47.2
476 J	47.6
480 J	48
481 J	48.1
490 J	49
496 J	49.6
497 J	49.7
500 J	50
506 J	50.6
510 J	51
512 J	51.2
515 J	51.5
518 J	51.8
520 J	52
525 J	52.5
528 J	52.8
533 J	53.3
540 J	54
550 J	55
562 J	56.2
567 J	56.7

Section J	
Part No.	Length inch
575 J	57.5
580 J	58
581 J	58.1
598 J	59.8
610 J	61
630 J	63
640 J	64
650 J	65
655 J	65.5
669 J	66.9
690 J	69
701 J	70.1
709 J	70.9
730 J	73
738 J	73.8
746 J	74.6
752 J	75.2
754 J	75.4
758 J	75.8
760 J	76
770 J	77
774 J	77.4
779 J	77.9
784 J	78.4
795 J	79.5
820 J	82
848 J	84.8
870 J	87
900 J	90
921 J	92.1
980 J	98

Section L	
Part No.	Length inch
375 L	37.5
390 L	39
410 L	41
423 L	42.3
450 L	45
460 L	46
470 L	47
480 L	48
500 L	50
510 L	51
520 L	52
530 L	53
540 L	54
550 L	55
560 L	56
565 L	56.5
580 L	58
590 L	59
615 L	61.5
620 L	62
635 L	63.5

Section L	
Part No.	Length inch
650 L	65
655 L	65.5
665 L	66.5
675 L	67.5
680 L	68
685 L	68.5
695 L	69.5
710 L	71
725 L	72.5
765 L	76.5
770 L	77
780 L	78
795 L	79.5
815 L	81.5
825 L	82.5
840 L	84
865 L	86.5
880 L	88
915 L	91.5
930 L	93
975 L	97.5

Section L	
Part No.	Length inch
990 L	99
1065 L	106.5
1080 L	108
1120 L	112
1140 L	114
1150 L	115
1180 L	118
1215 L	121.5
1230 L	123
1290 L	129.5
1310 L	131
1375 L	137.5
1450 L	145.5
1595 L	159.5
1650 L	165
1760 L	176
1820 L	182
1980 L	198
2120 L	212
2400 L	240