


Metric Poly-V Belts

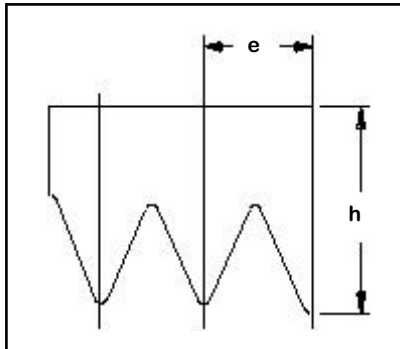

SECTION	e mm	h mm
H	1.60	3.0
J	2.34	4.0
K	3.56	4.0-6.0
L	4.70	10.0
M	9.40	17.0

Ametric® Poly-V Belts

- Moderately oil-resistant
- Resistant to temperatures from -30 to 80° C
- Suitable for tropical climates

Ordering Example:

4 J 1200
 4----- Number of ribs
 J----- Section
 1200--- Nominal pitch length (mm)

**Ametric® Poly-V Belts
 Now Available in
 Section H
 and
 Section K.**

Section J		
Part No.	Length	
	mm	inch
J 280	279	11
J 330	330	13
J 356	356	14
J 362	363	14.3
J 381	381	15
J 406	406	16
J 414	414	16.3
J 432	432	17
J 457	457	18
J 483	483	19
J 508	508	20
J 559	559	22
J 572	572	22.5
J 584	584	23
J 610	610	24
J 660	660	26
J 686	686	27
J 711	711	28
J 723	724	28.5
J 737	737	29
J 762	762	30
J 813	813	32
J 836	836	32.9
J 838	838	33
J 864	864	34
J 890	889	35
J 914	914	36
J 955	955	37.6
J 965	965	38
J 991	991	39
J 1016	1016	40
J 1055	1054	41.5
J 1092	1092	43
J 1100	1100	43.3
J 1105	1105	43.5
J 1110	1110	43.7
J 1123	1123	44.2
J 1130	1130	44.5
J 1142	1143	45
J 1150	1151	45.3
J 1168	1168	46
J 1185	1186	46.7
J 1194	1194	47
J 1200	1199	47.2
J 1208	1209	47.6
J 1220	1219	48
J 1222	1222	48.1
J 1244	1245	49
J 1260	1260	49.6
J 1262	1262	49.7
J 1270	1270	50
J 1285	1285	50.6
J 1295	1295	51
J 1301	1300	51.2
J 1309	1308	51.5
J 1316	1316	51.8
J 1321	1321	52
J 1333	1334	52.5
J 1340	1341	52.8
J 1355	1354	53.3
J 1371	1372	54
J 1397	1397	55
J 1428	1427	56.2
J 1439	1440	56.7
J 1460	1461	57.5

Section J		
Part No.	Length	
	mm	inch
J 1473	1473	58
J 1475	1476	58.1
J 1518	1519	59.8
J 1549	1549	61
J 1600	1600	63
J 1625	1626	64
J 1651	1651	65
J 1663	1664	65.5
J 1700	1699	66.9
J 1752	1753	69
J 1780	1781	70.1
J 1800	1801	70.9
J 1854	1854	73
J 1875	1875	73.8
J 1895	1895	74.6
J 1910	1910	75.2
J 1915	1915	75.4
J 1925	1925	75.8
J 1930	1930	76
J 1956	1956	77
J 1965	1966	77.4
J 1980	1979	77.9
J 1992	1991	78.4
J 2020	2019	79.5
J 2083	2083	82
J 2155	2154	84.8
J 2210	2210	87
J 2286	2286	90
J 2340	2337	92.1
J 2490	2489	98
Section L		
L 954	953	37.5
L 991	991	39
L 1041	1041	41
L 1075	1074	42.3
L 1149	1143	45
L 1168	1168	46
L 1194	1194	47
L 1219	1219	48
L 1270	1270	50
L 1295	1295	51
L 1333	1321	52
L 1346	1346	53
L 1371	1372	54
L 1397	1397	55
L 1422	1422	56
L 1435	1435	56.5
L 1475	1473	58
L 1500	1499	59
L 1562	1562	61.5
L 1580	1575	62
L 1613	1613	63.5
L 1651	1651	65
L 1664	1664	65.5
L 1690	1689	66.5
L 1715	1715	67.5
L 1727	1727	68
L 1740	1740	68.5
L 1764	1765	69.5
L 1803	1803	71
L 1841	1842	72.5
L 1943	1943	76.5
L 1956	1956	77

Section L		
Part No.	Length	
	mm	inch
L 1981	1981	78
L 2020	2019	79.5
L 2070	2070	81.5
L 2095	2096	82.5
L 2135	2134	84
L 2195	2197	86.5
L 2235	2235	88
L 2325	2324	91.5
L 2360	2362	93
L 2477	2477	97.5
L 2515	2515	99
L 2705	2705	106.5
L 2745	2743	108
L 2845	2845	112
L 2895	2896	114
L 2920	2921	115
L 2995	2997	118
L 3085	3086	121.5
L 3125	3124	123
L 3290	3289	129.5
L 3325	3327	131
L 3492	3492	137.5
L 3695	3696	145.5
L 4050	4051	159.5
L 4190	4191	165
L 4470	4470	176
L 4620	4623	182
L 5030	5029	198
L 5385	5385	212
L 6095	6096	240
Section M		
M 2285	2286	90
M 2390	2388	94
M 2515	2515	99
M 2695	2692	106
M 2830	2832	111.5
M 2920	2921	115
M 3010	3010	118.5
M 3125	3124	123
M 3325	3327	131
M 3530	3531	139
M 3735	3734	147
M 4090	4089	161
M 4190	4191	165
M 4470	4470	176
M 4650	4648	183
M 5030	5029	198
M 5410	5410	213
M 6120	6121	241
M 6885	6883	271
M 7645	7645	301
M 8410	8407	331
M 9170	9169	361
M 9930	9931	391
M 10695	10693	421
M 12215	12217	481
M 13740	13741	541
M 15265	15265	601
M 16785	16789	661