




American Standard ANSI (Inch) MPB V-Belt Sheaves Cast Iron



Type P

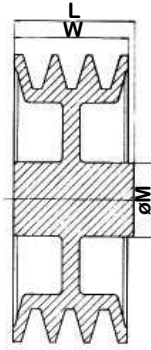

Type D

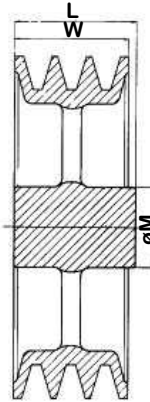

Type R

A or 4L

Part No.	O.D.	P.D. A	P.D. 4L	Grv.	Type	M	L
1A20	2.2	2	1.66	1	P	1 1/4	1 3/8
2A20	2.2	2	1.66	2	P	1 9/16	1 3/4
3A20	2.2	2	1.66	3	P	1 9/16	2 1/8
1A22	2.4	2.2	1.86	1	P	1 3/8	1 3/8
2A22	2.4	2.2	1.86	2	P	1 9/16	1 3/4
3A22	2.4	2.2	1.86	3	P	1 9/16	2 1/8
1A25	2.7	2.5	2.16	1	P	1 9/16	1 3/8
2A25	2.7	2.5	2.16	2	P	1 9/16	1 3/4
3A25	2.7	2.5	2.16	3	P	1 9/16	2 1/8
4A25	2.7	2.5	2.16	4	P	1 9/16	2 5/8
5A25	2.7	2.5	2.16	5	P	1 9/16	3 5/16
1A28	3	2.8	2.46	1	P	1 9/16	1 3/8
2A28	3	2.8	2.46	2	P	1 15/16	1 3/4
3A28	3	2.8	2.46	3	P	1 15/16	2 1/8
4A28	3	2.8	2.46	4	P	1 15/16	2 5/8
5A28	3	2.8	2.46	5	P	1 15/16	3 5/16
1A30	3.2	3	2.66	1	P	1 9/16	1 3/8
2A30	3.2	3	2.66	2	P	1 15/16	1 3/4
3A30	3.2	3	2.66	3	P	2 1/16	2 1/8
4A30	3.2	3	2.66	4	P	2 1/16	2 5/8
5A30	3.2	3	2.66	5	P	2 1/16	3 5/16
1A32	3.4	3.2	2.86	1	P	1 3/4	1 3/8
2A32	3.4	3.2	2.86	2	P	1 15/16	1 3/4
3A32	3.4	3.2	2.86	3	P	2 1/2	2 1/8
4A32	3.4	3.2	2.86	4	P	2 1/2	2 5/8
5A32	3.4	3.2	2.86	5	P	2 1/2	3 5/16
1A34	3.6	3.4	3.06	1	D	1 3/4	1 3/8
2A34	3.6	3.4	3.06	2	P	1 15/16	1 3/4
3A34	3.6	3.4	3.06	3	P	2 7/16	2 1/8
4A34	3.6	3.4	3.06	4	P	2 7/16	2 5/8
5A34	3.6	3.4	3.06	5	-	-	-
1A36	3.8	3.6	3.26	1	D	1 3/4	1 3/8
2A36	3.8	3.6	3.26	2	P	2 3/8	1 3/4
3A36	3.8	3.6	3.26	3	P	2 7/16	2 1/8
4A36	3.8	3.6	3.26	4	P	2 11/16	2 5/8
5A36	3.8	3.6	3.26	5	P	2 11/16	3 5/16
1A38	4	3.8	3.46	1	D	1 3/4	1 3/8
2A38	4	3.8	3.46	2	P	2 3/8	1 3/4
3A38	4	3.8	3.46	3	P	2 7/16	2 1/8
4A38	4	3.8	3.46	4	P	2 11/16	2 5/8
5A38	4	3.8	3.46	5	-	-	-

Ordering Example: 2A34


2 = Grooves
A = Profile
34 = Pitch Dia.

A or 4L

Part No.	O.D.	P.D. A	P.D. 4L	Grv.	Type	M	L
1A40	4.2	4	3.66	1	D	1 3/4	1 3/8
2A40	4.2	4	3.66	2	P	2 3/8	1 3/4
3A40	4.2	4	3.66	3	P	2 7/16	2 1/8
4A40	4.2	4	3.66	4	P	2 3/4	1 15/16
5A40	4.2	4	3.66	5	P	2 3/4	1 15/16
1A42	4.4	4.2	3.86	1	D	1 3/4	1 3/8
2A42	4.4	4.2	3.86	2	D	2 3/8	1 3/4
3A42	4.4	4.2	3.86	3	D	2 3/8	2 1/8
4A42	4.4	4.2	3.86	4	P	2 11/16	1 15/16
5A42	4.4	4.2	3.86	5	-	-	-
1A44	4.6	4.4	4.06	1	D	1 3/4	1 3/8
2A44	4.6	4.4	4.06	2	D	2 3/8	1 3/4
3A44	4.6	4.4	4.06	3	D	2 3/8	2 1/8
4A44	4.6	4.4	4.06	4	P	2 11/16	1 15/16
5A44	4.6	4.4	4.06	5	P	2 11/16	1 15/16
1A46	4.8	4.6	4.26	1	D	2 3/8	1 3/8
2A46	4.8	4.6	4.26	2	D	2 3/8	1 3/4
3A46	4.8	4.6	4.26	3	D	2 3/4	2 1/8
4A46	4.8	4.6	4.26	4	P	2 3/4	1 15/16
5A46	4.8	4.6	4.26	5	P	3 1/8	1 15/16
1A49	5.1	4.9	4.56	1	D	2 3/16	1 3/8
2A49	5.1	4.9	4.56	2	D	2 3/8	1 3/4
3A49	5.1	4.9	4.56	3	D	2 11/16	2 1/8
4A49	5.1	4.9	4.56	4	D	2 11/16	1 15/16
5A49	5.1	4.9	4.56	5	D	3 1/8	1 15/16
1A52	5.4	5.2	4.86	1	D	2 3/16	1 3/8
2A52	5.4	5.2	4.86	2	D	2 3/8	1 3/4
3A52	5.4	5.2	4.86	3	D	2 11/16	2 1/8
4A52	5.4	5.2	4.86	4	D	2 11/16	1 15/16
5A52	5.4	5.2	4.86	5	D	3 1/8	1 15/16
1A55	5.7	5.5	5.16	1	D	2 3/8	1 3/8
2A55	5.7	5.5	5.16	2	D	2 3/8	1 3/4
3A55	5.7	5.5	5.16	3	D	2 11/16	2 1/8
4A55	5.7	5.5	5.16	4	D	2 11/16	1 15/16
5A55	5.7	5.5	5.16	5	D	3 1/8	1 15/16
1A59	6.1	5.9	5.56	1	D	2 3/8	1 5/8
2A59	6.1	5.9	5.56	2	D	2 3/8	1 3/4
3A59	6.1	5.9	5.56	3	D	2 11/16	1 15/16
4A59	6.1	5.9	5.56	4	D	2 11/16	1 15/16
5A59	6.1	5.9	5.56	5	D	3 1/8	1 15/16
1A63	6.5	6.3	5.96	1	D	2 3/8	1 5/8

American Standard ANSI (Inch) MPB V-Belt Sheaves

Cast Iron

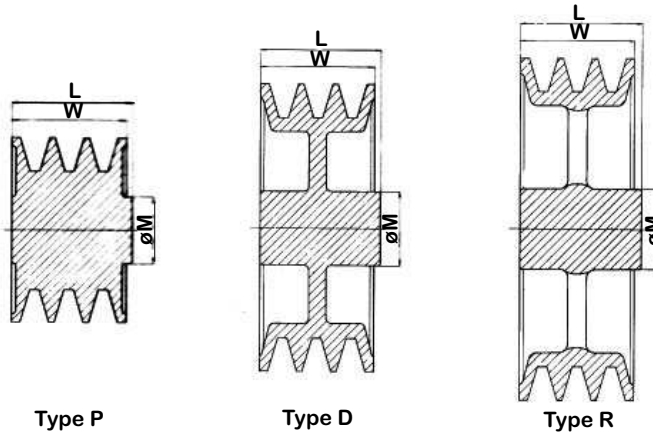

Type P

Type D

Type R

A or 4L

Part No.	O.D.	P.D. A	P.D. 4L	Grv.	Type	M	L
2A63	6.5	6.3	5.96	2	D	2 3/8	1 3/4
3A63	6.5	6.3	5.96	3	D	2 11/16	1 15/16
4A63	6.5	6.3	5.96	4	D	3 1/8	1 15/16
5A63	6.5	6.3	5.96	5	-	-	-
1A67	6.9	6.7	6.36	1	D	2 3/8	1 5/8
2A67	6.9	6.7	6.36	2	D	2 3/8	1 3/4
3A67	6.9	6.7	6.36	3	D	2 11/16	1 15/16
4A67	6.9	6.7	6.36	4	D	3 1/8	1 15/16
5A67	6.9	6.7	6.36	5	-	-	-
1A71	7.3	7.1	6.76	1	D	2 9/16	1 5/8
2A71	7.3	7.1	6.76	2	D	2 11/16	1 15/16
3A71	7.3	7.1	6.76	3	D	2 11/16	1 15/16
4A71	7.3	7.1	6.76	4	D	3 1/8	2 3/8
5A71	7.3	7.1	6.76	5	D	3 1/8	2 9/16
1A75	7.7	7.5	7.16	1	D	2 9/16	1 5/8
2A75	7.7	7.5	7.16	2	D	2 11/16	1 15/16
3A75	7.7	7.5	7.16	3	D	2 11/16	1 15/16
4A75	7.7	7.5	7.16	4	D	3 1/8	2 3/8
5A75	7.7	7.5	7.16	5	D	3 1/8	2 9/16
1A79	8.1	7.9	7.56	1	D-6F	2 9/16	1 5/8
2A79	8.1	7.9	7.56	2	D-6F	2 11/16	1 15/16
3A79	8.1	7.9	7.56	3	D-8F	2 15/16	1 15/16
4A79	8.1	7.9	7.56	4	D	3 7/16	2 3/8
5A79	8.1	7.9	7.56	5	D	3 7/16	2 9/16
1A88	9	8.8	8.46	1	D-6F	2 11/16	1 5/8
2A88	9	8.8	8.46	2	D-6F	2 11/16	1 15/16
3A88	9	8.8	8.46	3	D-6F	2 15/16	1 15/16
4A88	9	8.8	8.46	4	D-6F	3 7/16	2 3/8
5A88	9	8.8	8.46	5	D-6F	3 7/16	2 9/16
1A93	9.5	9.3	8.96	1	D-6F	2 11/16	1 5/8
2A93	9.5	9.3	8.96	2	D-6F	2 11/16	1 15/16
3A93	9.5	9.3	8.96	3	D-6F	2 15/16	1 15/16
4A93	9.5	9.3	8.96	4	D-8F	3 7/16	2 3/8
5A93	9.5	9.3	8.96	5	D-8F	3 7/16	2 9/16
1A98	10	9.8	9.46	1	3R	2 15/16	1 15/16
2A98	10	9.8	9.46	2	3R	2 15/16	1 15/16
3A98	10	9.8	9.46	3	3R	2 15/16	1 15/16
4A98	10	9.8	9.46	4	3R	3 7/16	2 3/8
5A98	10	9.8	9.46	5	3R	3 3/4	2 9/16
1A110	11.2	11	10.66	1	3R	2 11/16	1 15/16
2A110	11.2	11	10.66	2	3R	2 15/16	1 15/16

Ordering Example: 2A34

2 = Grooves


A = Profile

34 = Pitch Dia.


A or 4L

Part No.	O.D.	P.D. A	P.D. 4L	Grv.	Type	M	L
3A110	11.2	11	10.66	3	3R	2 15/16	1 15/16
4A110	11.2	11	10.66	4	3R	3 7/16	2 3/8
5A110	11.2	11	10.66	5	3R	3 3/4	2 9/16
1A118	12	11.8	11.46	1	3R	2 15/16	1 15/16
2A118	12	11.8	11.46	2	3R	2 15/16	1 15/16
3A118	12	11.8	11.46	3	3R	3 7/16	2 3/8
4A118	12	11.8	11.46	4	3R	3 7/16	2 3/8
5A118	12	11.8	11.46	5	3R	3 3/4	2 3/4
1A124	12.6	12.4	12.06	1	-	-	-
2A124	12.6	12.4	12.06	2	3R	2 15/16	1 15/16
3A124	12.6	12.4	12.06	3	3R	3 7/16	2 3/8
4A124	12.6	12.4	12.06	4	3R	3 7/16	2 3/8
5A124	12.6	12.4	12.06	5	3R	3 3/4	2 3/4
1A140	14.2	14	13.66	1	-	-	-
2A140	14.2	14	13.66	2	3R	3 7/16	2 3/8
3A140	14.2	14	13.66	3	3R	3 7/16	2 3/8
4A140	14.2	14	13.66	4	3R	3 7/16	2 3/8
5A140	14.2	14	13.66	5	3R	3 3/4	2 3/4
1A158	16	15.8	15.46	1	-	-	-
2A158	16	15.8	15.46	2	6R	3 7/16	2 3/8
3A158	16	15.8	15.46	3	6R	3 3/4	2 9/16
4A158	16	15.8	15.46	4	6R	3 3/4	2 9/16
5A158	16	15.8	15.46	5	6R	3 3/4	2 3/4
1A177	17.9	17.7	17.36	1	-	-	-
2A177	17.9	17.7	17.36	2	-	-	-
3A177	17.9	17.7	17.36	3	-	-	-
4A177	17.9	17.7	17.36	4	-	-	-
5A177	17.9	17.7	17.36	5	-	-	-
1A197	19.9	19.7	19.36	1	-	-	-
2A197	19.9	19.7	19.36	2	-	-	-
3A197	19.9	19.7	19.36	3	-	-	-
4A197	19.9	19.7	19.36	4	-	-	-
5A197	19.9	19.7	19.36	5	-	-	-
2A220	22.2	22	21.66	2	-	-	-
3A220	22.2	22	21.66	3	-	-	-
4A220	22.2	22	21.66	4	-	-	-
5A220	22.2	22	21.66	5	-	-	-
1A248	25	24.8	24.46	1	-	-	-
1A248	25	24.8	24.46	1	-	-	-
1A248	25	24.8	24.46	1	-	-	-
1A248	25	24.8	24.46	1	-	-	-


American Standard ANSI (Inch) MPB V-Belt Sheaves Cast Iron



Type P



Type D

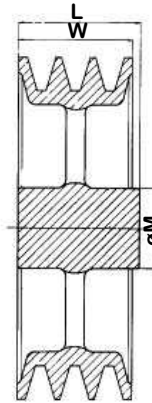

Type R

A/B

Part No.	O.D.	P.D. B	P.D. A	Grv.	Type	M	L
1B24	2.75	2.4	2	1	P	1 9/16	1 3/8
2B24	2.75	2.4	2	2	P	1 9/16	1 7/8
1B28	3.15	2.8	2.4	1	P	1 3/4	1 3/8
2B28	3.15	2.8	2.4	2	P	1 3/4	1 7/8
3B28	3.15	2.8	2.4	3	P	1 3/4	2 5/8
1B30	3.35	3	2.6	1	P	1 3/4	1 3/8
2B30	3.35	3	2.6	2	P	1 3/4	1 7/8
3B30	3.35	3	2.6	3	P	1 3/4	2 5/8
1B32	3.55	3.2	2.8	1	P	1 15/16	1 3/8
2B32	3.55	3.2	2.8	2	P	1 15/16	1 7/8
3B32	3.55	3.2	2.8	3	P	1 15/16	2 5/8
4B32	3.55	3.2	2.8	4	P	2 1/16	3 3/8
5B32	3.55	3.2	2.8	5	P	2 5/16	4 1/8
1B34	3.75	3.4	3	1	P	1 15/16	1 3/8
2B34	3.75	3.4	3	2	P	1 15/16	1 7/8
3B34	3.75	3.4	3	3	P	2 1/16	2 5/8
4B34	3.75	3.4	3	4	-	-	-
5B34	3.75	3.4	3	5	-	-	-
1B36	3.95	3.6	3.2	1	P	1 15/16	1 3/8
2B36	3.95	3.6	3.2	2	P	1 15/16	1 7/8
3B36	3.95	3.6	3.2	3	P	2 5/16	2 5/8
4B36	3.95	3.6	3.2	4	P	2 9/16	1 15/16
5B36	3.95	3.6	3.2	5	-	-	-
1B38	4.15	3.8	3.4	1	P	2 1/16	1 3/8
2B38	4.15	3.8	3.4	2	P	2 3/16	1 7/8
3B38	4.15	3.8	3.4	3	P	2 5/16	2 5/8
4B38	4.15	3.8	3.4	4	P	2 9/16	1 15/16
5B38	4.15	3.8	3.4	5	P	2 9/16	1 15/16
1B40	4.35	4	3.6	1	P	2 1/16	1 3/8
2B40	4.35	4	3.6	2	P	2 3/16	1 7/8
3B40	4.35	4	3.6	3	P	2 5/16	2 5/8
4B40	4.35	4	3.6	4	P	2 9/16	1 15/16
5B40	4.35	4	3.6	5	P	2 9/16	1 15/16
1B42	4.55	4.2	3.8	1	P	1 15/16	1 3/8
2B42	4.55	4.2	3.8	2	P	2 3/16	1 7/8
3B42	4.55	4.2	3.8	3	P	2 9/16	1 15/16
4B42	4.55	4.2	3.8	4	P	2 9/16	1 15/16
5B42	4.55	4.2	3.8	5	-	-	-
1B44	4.75	4.4	4	1	D	2 3/16	1 3/8
2B44	4.75	4.4	4	2	D	2 3/8	1 7/8
3B44	4.75	4.4	4	3	P	2 9/16	1 15/16
4B44	4.75	4.4	4	4	P	2 15/16	1 15/16
5B44	4.75	4.4	4	5	P	2 15/16	1 15/16
1B46	4.95	4.6	4.2	1	D	2 3/16	1 3/8
2B46	4.95	4.6	4.2	2	D	2 3/8	1 7/8
3B46	4.95	4.6	4.2	3	P	2 15/16	1 15/16
4B46	4.95	4.6	4.2	4	P	2 15/16	1 15/16

A/B

Part No.	O.D.	P.D. B	P.D. A	Grv.	Type	M	L
5B46	4.95	4.6	4.2	5	P	2 15/16	1 15/16
1B49	5.25	4.9	4.5	1	D	2 3/16	1 3/8
2B49	5.25	4.9	4.5	2	D	2 3/8	1 7/8
3B49	5.25	4.9	4.5	3	D	2 15/16	1 15/16
4B49	5.25	4.9	4.5	4	D	2 15/16	1 15/16
5B49	5.25	4.9	4.5	5	D	2 15/16	1 15/16
6B49	5.25	4.9	4.5	6	P	3 1/8	2 3/8
1B52	5.55	5.2	4.8	1	D	2 3/8	1 3/8
2B52	5.55	5.2	4.8	2	D	2 3/8	1 15/16
3B52	5.55	5.2	4.8	3	D	2 15/16	1 15/16
4B52	5.55	5.2	4.8	4	D	3 1/8	1 15/16
5B52	5.55	5.2	4.8	5	D	3 1/8	2 3/8
6B52	5.55	5.2	4.8	6	D	3 1/8	2 3/8
1B56	5.95	5.6	5.2	1	D	2 3/8	1 3/8
2B56	5.95	5.6	5.2	2	D	2 9/16	1 15/16
3B56	5.95	5.6	5.2	3	D	2 15/16	1 15/16
4B56	5.95	5.6	5.2	4	D	3 1/8	1 15/16
5B56	5.95	5.6	5.2	5	D	3 1/8	2 3/8
6B56	5.95	5.6	5.2	6	D	3 1/8	2 3/8
1B60	6.35	6	5.6	1	D	2 3/8	1 9/16
2B60	6.35	6	5.6	2	D	2 9/16	1 15/16
3B60	6.35	6	5.6	3	D	2 15/16	1 15/16
4B60	6.35	6	5.6	4	D	3 1/8	1 15/16
5B60	6.35	6	5.6	5	D	3 1/8	2 3/8
6B60	6.35	6	5.6	6	D	3 7/16	2 3/8
1B62	6.55	6.2	5.8	1	D	2 9/16	1 9/16
2B62	6.55	6.2	5.8	2	D	2 11/16	1 15/16
3B62	6.55	6.2	5.8	3	D	3 1/8	1 15/16
4B62	6.55	6.2	5.8	4	D	3 7/16	2 3/8
5B62	6.55	6.2	5.8	5	D	3 7/16	2 3/8
6B62	6.55	6.2	5.8	6	D	3 7/16	2 9/16
1B68	7.15	6.8	6.4	1	D	2 9/16	1 9/16
2B68	7.15	6.8	6.4	2	D	2 11/16	1 15/16
3B68	7.15	6.8	6.4	3	D	3 1/8	1 15/16
4B68	7.15	6.8	6.4	4	D	3 7/16	2 3/8
5B68	7.15	6.8	6.4	5	D	3 7/16	2 3/8
6B68	7.15	6.8	6.4	6	D	4 1/8	2 9/16
1B71	7.45	7.1	6.7	1	D	2 9/16	1 9/16
2B71	7.45	7.1	6.7	2	D	2 11/16	1 15/16
3B71	7.45	7.1	6.7	3	D	3 1/8	1 15/16
4B71	7.45	7.1	6.7	4	D	3 7/16	2 3/8
5B71	7.45	7.1	6.7	5	D	3 7/16	2 3/4
6B71	7.45	7.1	6.7	6	D	4 1/8	2 3/4
1B74	7.75	7.4	7	1	D	2 9/16	1 9/16
2B74	7.75	7.4	7	2	D	2 11/16	1 15/16
3B74	7.75	7.4	7	3	D	3 1/8	1 15/16
4B74	7.75	7.4	7	4	D	3 7/16	2 3/8

Ordering Example: 5B32


5 = Grooves

B = Profile


32 = Pitch Dia.

American Standard ANSI (Inch) MPB V-Belt Sheaves


Cast Iron



Type P



Type D

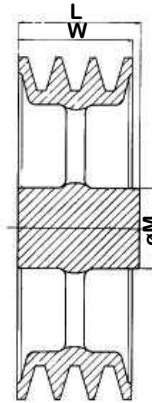

Type R

A/B

Part No.	O.D.	P.D. B	P.D. A	Grv.	Type	M	L
5B74	7.75	7.4	7	5	D	3 7/16	2 3/4
6B74	7.75	7.4	7	6	-	-	-
1B79	8.25	7.9	7.5	1	D	2 11/16	1 9/16
2B79	8.25	7.9	7.5	2	D	2 11/16	1 15/16
3B79	8.25	7.9	7.5	3	D	3 1/8	1 15/16
4B79	8.25	7.9	7.5	4	D	3 7/16	2 3/8
5B79	8.25	7.9	7.5	5	D	3 7/16	2 3/4
6B79	8.25	7.9	7.5	6	D	4 1/8	3 1/8
1B83	8.65	8.3	7.9	1	D-6F	2 11/16	1 3/4
2B83	8.65	8.3	7.9	2	D-6F	2 11/16	1 15/16
3B83	8.65	8.3	7.9	3	D	3 1/8	1 15/16
4B83	8.65	8.3	7.9	4	D	3 7/16	2 3/8
5B83	8.65	8.3	7.9	5	-	-	-
6B83	8.65	8.3	7.9	6	-	-	-
1B88	9.15	8.8	8.4	1	D-6F	2 11/16	1 3/4
2B88	9.15	8.8	8.4	2	D-6F	2 15/16	1 15/16
3B88	9.15	8.8	8.4	3	D-6F	3 1/8	1 15/16
4B88	9.15	8.8	8.4	4	D	3 7/16	2 3/8
5B88	9.15	8.8	8.4	5	D	3 3/4	2 3/4
6B88	9.15	8.8	8.4	6	D	4 1/8	3 1/8
1B93	9.65	9.3	8.9	1	D-6F	2 11/16	1 3/4
2B93	9.65	9.3	8.9	2	D-6F	2 15/16	1 15/16
3B93	9.65	9.3	8.9	3	D-6F	3 1/8	2 3/8
4B93	9.65	9.3	8.9	4	D-6F	3 7/16	2 9/16
5B93	9.65	9.3	8.9	5	D-6F	3 3/4	2 15/16
6B93	9.65	9.3	8.9	6	D	4 1/8	3 1/8
1B98	10.15	9.8	9.4	1	3R	2 3/4	1 3/4
2B98	10.15	9.8	9.4	2	3R	2 15/16	1 15/16
3B98	10.15	9.8	9.4	3	3R	3 7/16	2 3/8
4B98	10.15	9.8	9.4	4	3R	3 3/4	2 9/16
5B98	10.15	9.8	9.4	5	D-6F	4 1/8	2 15/16
6B98	10.15	9.8	9.4	6	D-6F	4 1/8	3 1/8
1B110	11.35	11	10.6	1	3R	2 15/16	1 3/4
2B110	11.35	11	10.6	2	3R	2 15/16	1 15/16
3B110	11.35	11	10.6	3	3R	3 7/16	2 3/8
4B110	11.35	11	10.6	4	3R	3 3/4	2 9/16
5B110	11.35	11	10.6	5	3R	4 1/8	2 15/16
6B110	11.35	11	10.6	6	3R	4 1/8	3 1/8
1B118	12.15	11.8	11.4	1	3R	2 15/16	1 15/16
2B118	12.15	11.8	11.4	2	3R	3 1/8	1 15/16
3B118	12.15	11.8	11.4	3	3R	3 7/16	2 3/8
4B118	12.15	11.8	11.4	4	3R	3 3/4	2 9/16
5B118	12.15	11.8	11.4	5	3R	4 1/8	2 15/16
6B118	12.15	11.8	11.4	6	3R	4 1/8	3 1/8
1B124	12.75	12.4	12	1	3R	3 7/16	2 3/8
2B124	12.75	12.4	12	2	3R	3 7/16	2 3/8
3B124	12.75	12.4	12	3	3R	3 3/4	2 9/16
	12.75	12.4	12	4	3R	4 1/8	2 15/16

A/B

Part No.	O.D.	P.D. B	P.D. A	Grv.	Type	M	L
4B124	12.75	12.4	12	5	3R	4 3/4	3 9/16
5B124	12.75	12.4	12	6	-	-	-
6B124	14.35	14	13.6	1	-	-	-
1B140	14.35	14	13.6	2	3R	3 7/16	2 3/8
2B140	14.35	14	13.6	3	3R	3 3/4	2 3/8
3B140	14.35	14	13.6	4	3R	3 3/4	2 9/16
4B140	14.35	14	13.6	5	3R	4 1/8	2 15/16
5B140	14.35	14	13.6	6	3R	4 3/4	3 9/16
6B140	16.15	15.8	15.4	1	-	-	-
1B158	16.15	15.8	15.4	2	6R	3 7/16	2 3/8
2B158	16.15	15.8	15.4	3	6R	3 3/4	2 9/16
3B158	16.15	15.8	15.4	4	6R	4 1/8	2 15/16
4B158	16.15	15.8	15.4	5	6R	4 7/16	3 3/8
5B158	16.15	15.8	15.4	6	6R	4 3/4	3 15/16
6B158	18.05	17.7	17.3	1	-	-	-
1B177	18.05	17.7	17.3	2	6R	3 7/16	2 3/8
2B177	18.05	17.7	17.3	3	6R	3 3/4	2 9/16
3B177	18.05	17.7	17.3	4	6R	4 1/8	2 15/16
4B177	18.05	17.7	17.3	5	6R	4 7/16	3 3/8
5B177	18.05	17.7	17.3	6	6R	4 3/4	3 15/16
6B177	20.05	19.7	19.3	1	-	-	-
1B197	20.05	19.7	19.3	2	6R	3 3/4	2 9/16
2B197	20.05	19.7	19.3	3	6R	4 1/8	2 15/16
3B197	20.05	19.7	19.3	4	6R	4 7/16	3 3/8
4B197	20.05	19.7	19.3	5	6R	4 3/4	3 9/16
5B197	20.05	19.7	19.3	6	6R	5 1/16	4 1/8
6B197	22.35	22	21.6	2	6R	3 3/4	2 9/16
2B220	22.35	22	21.6	3	6R	4 1/8	2 15/16
3B220	22.35	22	21.6	4	6R	4 7/16	3 3/8
4B220	22.35	22	21.6	5	6R	4 3/4	3 9/16
5B220	22.35	22	21.6	6	6R	5 1/16	4 1/8
6B220	25.15	24.8	24.4	2	6R	4 1/8	2 15/16
2B248	25.15	24.8	24.4	3	6R	4 3/4	3 9/16
3B248	25.15	24.8	24.4	4	6R	5 1/16	4 1/8
4B248	25.15	24.8	24.4	5	6R	5 11/16	4 1/2
5B248	25.15	24.8	24.4	6	6R	5 11/16	4 1/2
6B248	28.35	28	27.6	2	6R	3 3/4	2 9/16
2B280	28.35	28	27.6	3	6R	4 7/16	2 15/16
3B280	28.35	28	27.6	4	6R	4 3/4	3 9/16
4B280	28.35	28	27.6	5	6R	5 1/16	4 1/8
5B280	28.35	28	27.6	6	-	-	-
6B280	31.85	31.5	31.1	2	-	-	-
2B315	31.85	31.5	31.1	3	-	-	-
3B315	31.85	31.5	31.1	4	-	-	-
4B315	31.85	31.5	31.1	5	-	-	-
5B315	31.85	31.5	31.1	6	-	-	-
6B315							

Ordering Example: 5B32

5 = Grooves

B = Profile

32 = Pitch Dia.



American Metric® Corporation

GROUP: 133

1-133-041214

American Standard ANSI (Inch) MPB V-Belt Sheaves

Cast Iron

C

Part No.	O.D.	P.D. C	Grv.	Type	M	L
1C55	5.9	5.5	1	D	2 7/16	2 5/16
2C55	5.9	5.5	2	D	2 3/4	2 5/16
3C55	5.9	5.5	3	D	2 15/16	2 3/4
4C55	5.9	5.5	4	D	2 15/16	2 15/16
5C55	5.9	5.5	5	D	2 15/16	3 1/16
6C55	5.9	5.5	6	D	2 15/16	3 1/16
1C59	6.3	5.9	1	D	2 7/16	2 5/16
2C59	6.3	5.9	2	D	2 3/4	2 3/8
3C59	6.3	5.9	3	D	2 3/4	2 3/4
4C59	6.3	5.9	4	D	2 15/16	2 15/16
5C59	6.3	5.9	5	D	3	3 1/16
6C59	6.3	5.9	6	D	3 1/16	3 1/16
1C63	6.7	6.3	1	D	2 7/16	2 5/16
2C63	6.7	6.3	2	D	2 3/4	2 3/8
3C63	6.7	6.3	3	D	3	2 3/4
4C63	6.7	6.3	4	D	3 1/16	2 15/16
5C63	6.7	6.3	5	D	3 1/16	3 1/16
6C63	6.7	6.3	6	D	-	3 1/16
1C67	7.1	6.7	1	D	2 3/4	2 3/8
2C67	7.1	6.7	2	D	2 3/4	2 1/2
3C67	7.1	6.7	3	D	3	2 15/16
4C67	7.1	6.7	4	D	3 1/4	3
5C67	7.1	6.7	5	D	3 1/4	3 1/16
6C67	7.1	6.7	6	D	3 7/16	3 1/8
1C71	7.5	7.1	1	D	2 3/4	2 3/8
2C71	7.5	7.1	2	D	2 3/4	2 3/8
3C71	7.5	7.1	3	D	3 1/16	2 13/16
4C71	7.5	7.1	4	D	3 1/4	2 15/16
5C71	7.5	7.1	5	D	3 1/4	3 1/8
6C71	7.5	7.1	6	D	3 7/16	2 13/16
1C75	7.9	7.5	1	D	2 3/4	2 3/8
2C75	7.9	7.5	2	D	2 15/16	2 3/8
3C75	7.9	7.5	3	D	3 1/16	2 13/16
4C75	7.9	7.5	4	D	3 1/4	2 15/16
5C75	7.9	7.5	5	D	3 5/16	3 1/8
6C75	7.9	7.5	6	D	3 7/16	3 3/8
1C79	8.3	7.9	1	D	2 13/16	2 3/8
2C79	8.3	7.9	2	D	2 7/8	2 13/16
3C79	8.3	7.9	3	D	3 1/4	3
4C79	8.3	7.9	4	D	3 9/16	3 7/16
5C79	8.3	7.9	5	D	3 5/8	3 5/8
6C79	8.3	7.9	6	D	3 3/4	3 7/8
1C88	9.2	8.8	1	D	2 13/16	2 1/2
2C88	9.2	8.8	2	D	3	2 11/16
3C88	9.2	8.8	3	D	3 1/4	3
4C88	9.2	8.8	4	D	3 5/8	3 9/16
5C88	9.2	8.8	5	D	3 5/8	3 5/8
6C88	9.2	8.8	6	D	3 7/8	3 7/8
1C98	10.2	9.8	1	D	3 1/4	2 1/2
2C98	10.2	9.8	2	D	3 1/4	2 13/16
3C98	10.2	9.8	3	D	3 9/16	3 1/8
4C98	10.2	9.8	4	D	3 3/4	3 9/16
5C98	10.2	9.8	5	D	3 15/16	3 3/4
6C98	10.2	9.8	6	D	4	4

C

Part No.	O.D.	P.D. C	Grv.	Type	M	L
1C110	11.4	11	1	D	3 1/4	2 1/2
2C110	11.4	11	2	D	3 1/4	2 15/16
3C110	11.4	11	3	D	3 9/16	3 1/8
4C110	11.4	11	4	D	3 3/4	3 9/16
5C110	11.4	11	5	D	3 15/16	3 3/4
6C110	11.4	11	6	R	4	4
1C118	12.2	11.8	1	R	3 3/8	2 9/16
2C118	12.2	11.8	2	R	3 9/16	2 15/16
3C118	12.2	11.8	3	R	3 9/16	3 1/8
4C118	12.2	11.8	4	R	4 1/8	3 9/16
5C118	12.2	11.8	5	R	4 1/8	3 3/4
6C118	12.2	11.8	6	R	4 1/8	4 3/16
1C124	12.8	12.4	1	R	3 3/8	2 9/16
2C124	12.8	12.4	2	R	3 9/16	2 15/16
3C124	12.8	12.4	3	R	3 9/16	3 1/8
4C124	12.8	12.4	4	R	4 1/8	3 9/16
5C124	12.8	12.4	5	R	4 1/8	3 3/4
6C124	12.8	12.4	6	R	4 1/8	4 3/16
1C136	14	13.6	1	R	3 15/16	2 3/4
2C136	14	13.6	2	R	4 1/8	2 15/16
3C136	14	13.6	3	R	4 1/8	3 1/8
4C136	14	13.6	4	R	4 1/2	3 9/16
5C136	14	13.6	5	R	4 1/2	3 3/4
6C136	14	13.6	6	R	4 1/2	4 5/16
1C158	16.2	15.8	1	R	3 15/16	100
2C158	16.2	15.8	2	R	4 1/8	2 15/16
3C158	16.2	15.8	3	R	4 1/8	3 1/8
4C158	16.2	15.8	4	R	4 3/4	3 9/16
5C158	16.2	15.8	5	R	4 3/4	3 3/4
6C158	16.2	15.8	6	R	4 3/4	4 5/16
1C177	18.1	17.7	1	R	4 1/8	105
2C177	18.1	17.7	2	R	4 5/16	2 15/16
3C177	18.1	17.7	3	R	4 5/16	3 1/8
4C177	18.1	17.7	4	R	4 3/4	3 3/4
5C177	18.1	17.7	5	R	4 3/4	3 15/16
6C177	18.1	17.7	6	R	4 3/4	4 5/16
1C197	20.1	19.7	1	R	4 5/16	2 15/16
2C197	20.1	19.7	2	R	4 1/2	3 1/8
3C197	20.1	19.7	3	R	4 1/2	3 3/8
4C197	20.1	19.7	4	R	4 3/4	3 15/16
5C197	20.1	19.7	5	R	4 15/16	4 5/16
6C197	20.1	19.7	6	R	4 15/16	4 1/2
1C220	22.4	22	1	R	4 5/16	2 15/16
2C220	22.4	22	2	R	4 1/2	3 1/8
3C220	22.4	22	3	R	4 1/2	3 3/8
4C220	22.4	22	4	R	4 15/16	3 15/16
5C220	22.4	22	5	R	4 15/16	4 5/16
6C220	22.4	22	6	R	4 15/16	4 1/2
1C248	22.5	22.1	1	R	4 1/2	2 15/16
2C248	25.2	24.8	2	R	4 3/4	3 1/8
3C248	25.2	24.8	3	R	4 3/4	3 3/4
4C248	25.2	24.8	4	R	5 1/8	3 15/16
5C248	25.2	24.8	5	R	5 1/8	4 5/16
6C248	25.2	24.8	6	R	5 1/8	4 1/2


Ordering Example: 3C110

3 = Grooves

C = Profile

110 = Pitch Dia.

American Standard ANSI (Inch) MPB V-Belt Sheaves Aluminum

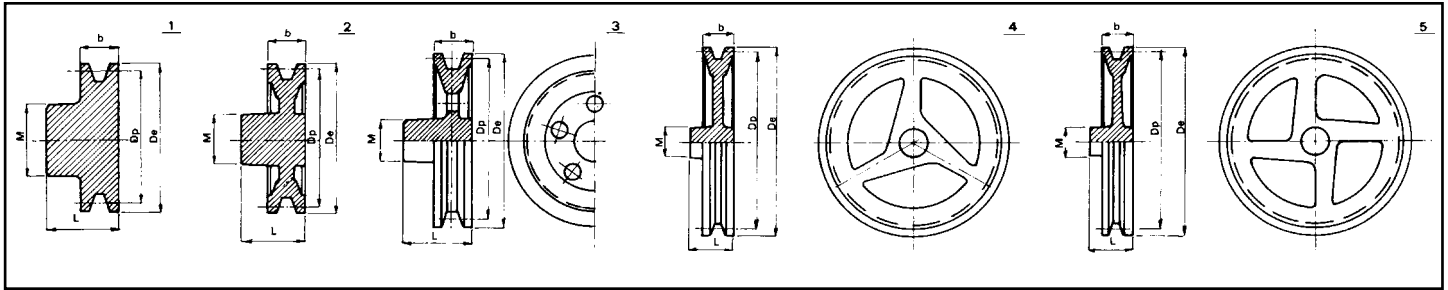

Profile A

PART NO.	P.D. DIA.	GROOVES	TYPE	M	L
1A16 AL	1.57	1	1	1 1/8	1 5/16
1A20 AL	1.97	1	1	1 3/8	1 5/16
1A24 AL	2.36	1	1	1 5/8	1 5/16
1A25 AL	2.56	1	1	1 5/8	1 5/16
1A27 AL	2.76	1	1	1 5/8	1 5/16
1A30 AL	2.95	1	2	1 5/8	1 5/16
1A32 AL	3.15	1	2	1 5/8	1 5/16
1A34 AL	3.35	1	2	1 5/8	1 5/16
1A36 AL	3.54	1	2	1 13/16	1 5/16
1A38 AL	3.74	1	2	1 13/16	1 5/16
1A40 AL	3.94	1	2	1 7/8	1 5/16
1A42 AL	4.13	1	2	1 7/8	1 5/16
1A43 AL	4.33	1	2	1 7/8	1 5/16
1A44 AL	4.41	1	3	1 7/8	1 5/16
1A45 AL	4.53	1	3	1 7/8	1 5/16
1A48 AL	4.72	1	3	1 7/8	1 5/16
1A50 AL	4.92	1	3	1 7/8	1 5/16
1A52 AL	5.12	1	3	2	1 5/16
1A54 AL	5.31	1	3	2	1 5/16
1A55 AL	5.51	1	3	2 1/8	1 5/16
1A60 AL	5.91	1	3	2 3/16	1 5/16
1A63 AL	6.30	1	3	2 3/16	1 5/16
1A65 AL	6.50	1	3	2 3/16	1 5/16
1A67 AL	6.69	1	3	2 1/4	1 5/16
1A70 AL	7.09	1	3	2 1/4	1 5/16
1A75 AL	7.48	1	3	2 5/16	1 5/16
1A80 AL	7.87	1	3	2 3/8	1 5/16
1A82 AL	8.27	1	3	2 3/8	1 5/16
1A86 AL	8.66	1	3	2 3/8	1 5/16
1A88 AL	8.86	1	4	2 3/8	1 5/16
1A90 AL	9.06	1	4	2 3/8	1 5/16
1A95 AL	9.45	1	4	2 3/8	1 5/16
1A98 AL	9.84	1	4	2 3/8	1 5/16
1A110 AL	11.02	1	4	2 1/2	1 5/16
1A118 AL	11.81	1	4	2 5/8	1 5/16
1A125 AL	12.60	1	4	2 3/4	1 5/16
1A138 AL	13.78	1	5	2 15/16	1 5/16
1A158 AL	15.75	1	5	3 1/8	1 5/16
1A178 AL	17.72	1	5	3 1/4	1 5/16
1A197 AL	19.69	1	5	3 3/8	1 5/16

PART NO.	P.D. DIA.	GROOVES	TYPE	M	L
2A16 AL	1.57	2	1	1 1/8	1 5/16
2A20 AL	1.97	2	1	1 3/8	1 5/16
2A24 AL	2.36	2	1	1 5/8	1 5/16
2A25 AL	2.56	2	1	1 5/8	1 5/16
2A27 AL	2.76	2	1	1 5/8	1 5/16
2A30 AL	2.95	2	2	1 5/8	1 5/16
2A32 AL	3.15	2	2	1 13/16	1 5/16
2A34 AL	3.35	2	2	1 13/16	1 5/16
2A36 AL	3.54	2	2	1 13/16	1 5/16
2A38 AL	3.74	2	2	1 13/16	1 5/16
2A40 AL	3.94	2	2	1 7/8	1 5/16
2A42 AL	4.13	2	2	1 7/8	1 5/16
2A43 AL	4.33	2	2	1 7/8	1 5/16
2A44 AL	4.41	2	3	1 7/8	1 5/16
2A45 AL	4.53	2	3	1 7/8	1 5/16
2A48 AL	4.72	2	3	1 7/8	1 5/16
2A50 AL	4.92	2	3	1 7/8	1 5/16
2A52 AL	5.12	2	3	1 15/16	1 5/16
2A54 AL	5.31	2	3	1 15/16	1 5/16
2A55 AL	5.51	2	3	2 3/8	1 5/16
2A60 AL	5.91	2	3	2 3/16	1 5/16
2A63 AL	6.30	2	3	2 5/16	1 5/16
2A65 AL	6.50	2	3	2 5/16	1 5/16
2A67 AL	6.69	2	3	2 5/16	1 5/16
2A70 AL	7.09	2	3	2 3/8	1 5/16
2A75 AL	7.48	2	3	2 3/8	1 5/16
2A80 AL	7.87	2	3	2 7/16	1 5/16
2A82 AL	8.27	2	3	2 7/16	1 5/16
2A86 AL	8.66	2	3	2 7/16	1 5/16
2A88 AL	8.86	2	4	2 7/16	1 5/16
2A90 AL	9.06	2	4	2 7/16	1 5/16
2A95 AL	9.45	2	4	2 7/16	1 5/16
2A98 AL	9.84	2	4	2 7/16	1 5/16
2A110 AL	11.02	2	4	2 1/2	1 5/16
2A118 AL	11.81	2	4	2 3/8	1 5/16
2A125 AL	12.60	2	4	2 3/4	1 5/16
2A138 AL	13.78	2	5	2 15/16	1 5/16
2A158 AL	15.75	2	5	3 1/8	1 5/16
2A178 AL	17.72	2	5	2 3/8	1 5/16
2A197 AL	19.69	2	5	2 3/8	1 5/16

Ordering Example:

1A16 AL
1A = 1A Profile
16 = Pitch Dia.
AL = Aluminum




American Metric® Corporation

GROUP: 133

1-133-041214

American Standard ANSI (Inch) MPB V-Belt Sheaves Aluminum

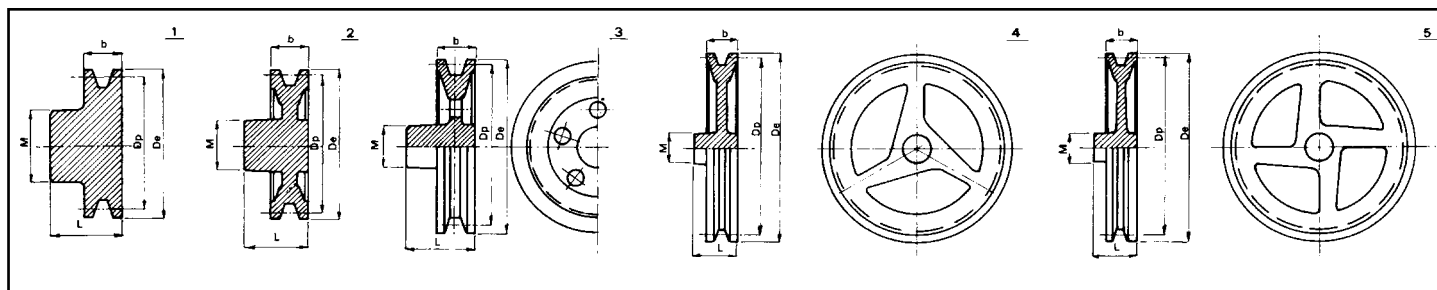

Profile A


PART NO.	P.D. DIA.	GROOVES	TYPE	M	L
3A16 AL	1.57	3	1	2 5/8	2 1/16
3A20 AL	1.97	3	1	3 1/8	2 1/16
3A24 AL	2.36	3	1	1 5/8	2 1/16
3A25 AL	2.56	3	1	1 5/8	2 1/16
3A27 AL	2.76	3	1	2 5/8	2 1/16
3A30 AL	2.95	3	2	3 1/8	2 1/16
3A32 AL	3.15	3	2	1 7/8	2 1/16
3A34 AL	3.35	3	2	1 7/8	2 1/16
3A36 AL	3.54	3	2	1 7/8	2 1/16
3A38 AL	3.74	3	2	1 7/8	2 1/16
3A40 AL	3.94	3	2	1 7/8	2 1/16
3A42 AL	4.13	3	2	1 7/8	2 1/16
3A43 AL	4.33	3	2	1 7/8	2 1/16
3A44 AL	4.41	3	2	1 7/8	2 1/16
3A45 AL	4.53	3	2	1 7/8	2 1/16
3A48 AL	4.72	3	2	1 7/8	2 1/16
3A50 AL	4.92	3	2	1 7/8	2 1/16
3A52 AL	5.12	3	2	2	2 1/16
3A54 AL	5.31	3	3	2	2 1/16
3A55 AL	5.51	3	3	2 3/16	2 1/16
3A60 AL	5.91	3	3	2 1/4	2 1/16
3A63 AL	6.30	3	3	2 3/8	2 1/16
3A65 AL	6.50	3	3	2 3/8	2 1/16
3A67 AL	6.69	3	3	2 3/8	2 1/16
3A70 AL	7.09	3	3	2 3/8	2 1/16
3A75 AL	7.48	3	3	2 7/16	2 1/16
3A80 AL	7.87	3	3	2 7/16	2 1/16
3A82 AL	8.27	3	3	2 7/16	2 1/16
3A86 AL	8.66	3	3	2 7/16	2 1/16
3A88 AL	8.86	3	4	2 7/16	2 1/16
3A90 AL	9.06	3	4	2 7/16	2 1/16
3A95 AL	9.45	3	4	2 7/16	2 1/16
3A98 AL	9.84	3	4	2 7/16	2 1/16
3A110 AL	11.02	3	4	3 4/8	2 1/16
3A118 AL	11.81	3	4	2 11/16	2 1/16
3A125 AL	12.60	3	4	2 3/4	2 1/16
3A138 AL	13.78	3	5	3	2 1/16
3A158 AL	15.75	3	5	3 3/16	2 1/16
3A178 AL	17.72	3	5	3 3/8	2 1/16
3A197 AL	19.69	3	5	3 3/4	2 1/16
4A16 AL	1.57	4	1	1	2 3/16
4A20 AL	1.97	4	1	1 3/8	2 3/16
4A24 AL	2.36	4	1	1 5/8	2 3/16
4A27 AL	2.76	4	1	1 5/8	2 3/16
4A32 AL	3.15	4	2	2 1/16	2 3/16
4A36 AL	3.54	4	2	1 7/8	2 3/16
4A40 AL	3.94	4	2	2 1/16	2 3/16
4A43 AL	4.33	4	2	2 1/16	2 3/16
4A48 AL	4.72	4	2	3 4/8	2 3/16

PART NO.	P.D. DIA.	GROOVES	TYPE	M	L
4A52 AL	5.12	4	2	2 3/16	2 3/16
4A55 AL	5.51	4	2	2 3/16	2 3/16
4A60 AL	5.91	4	3	2 9/16	2 3/16
4A63 AL	6.30	4	3	2 11/16	2 3/16
4A67 AL	6.69	4	3	2 11/16	2 3/16
4A70 AL	7.09	4	3	2 11/16	2 3/16
4A75 AL	7.48	4	3	2 11/16	2 3/16
4A80 AL	7.87	4	3	2 11/16	2 3/16
4A82 AL	8.27	4	3	2 11/16	2 3/16
4A86 AL	8.66	4	3	2 11/16	2 3/16
4A90 AL	9.06	4	4	2 11/16	2 3/16
4A95 AL	9.45	4	4	2 11/16	2 3/16
4A98 AL	9.84	4	4	2 11/16	2 3/16
4A110 AL	11.02	4	4	2 11/16	2 3/16
4A118 AL	11.81	4	4	2 13/16	2 3/16
4A125 AL	12.60	4	4	2 13/16	2 3/16
4A138 AL	13.78	4	5	3	2 3/16
4A158 AL	15.75	4	5	3 3/16	2 3/16
4A178 AL	17.72	4	5	3 3/8	2 3/16
4A197 AL	19.69	4	5	1 5/8	2 3/16
5A16 AL	1.57	5	1	1	2 1/8
5A20 AL	1.97	5	1	1 3/8	2 1/8
5A24 AL	2.36	5	1	1 5/8	2 1/8
5A27 AL	2.76	5	1	1 6/8	2 1/8
5A32 AL	3.15	5	2	1 7/8	2 1/8
5A36 AL	3.54	5	2	1 7/8	2 1/8
5A40 AL	3.94	5	2	2 1/16	2 1/8
5A43 AL	4.33	5	2	2 1/16	2 1/8
5A48 AL	4.72	5	2	2 3/16	2 1/8
5A52 AL	5.12	5	2	2 3/16	2 1/8
5A55 AL	5.51	5	2	2 4/8	2 1/8
5A60 AL	5.91	5	2	2 9/16	2 1/8
5A63 AL	6.30	5	2	2 11/16	2 1/8
5A67 AL	6.69	5	2	2 11/16	2 1/8
5A70 AL	7.09	5	3	2 11/16	2 1/8
5A75 AL	7.48	5	3	2 11/16	2 1/8
5A80 AL	7.87	5	3	2 11/16	2 1/8
5A82 AL	8.27	5	3	2 11/16	2 1/8
5A86 AL	8.66	5	3	2 11/16	2 1/8
5A90 AL	9.06	5	4	2 11/16	2 1/8
5A95 AL	9.45	5	4	2 15/16	2 1/8
5A98 AL	9.84	5	4	2 15/16	2 1/8
5A110 AL	11.02	5	4	2 15/16	2 1/8
5A118 AL	11.81	5	4	2 15/16	2 1/8
5A125 AL	12.60	5	4	3 1/8	2 1/8
5A138 AL	13.78	5	5	3 1/8	2 1/8
5A158 AL	15.75	5	5	3 3/8	2 1/8
5A178 AL	17.72	5	5	3 9/16	2 1/8
5A197 AL	19.69	5	5	3 15/16	2 1/8

Ordering Example:

3A16 AL
3A = 3A Profile
16 = Pitch Dia.
AL = Aluminum

American Standard ANSI (Inch) MPB V-Belt Sheaves Aluminum

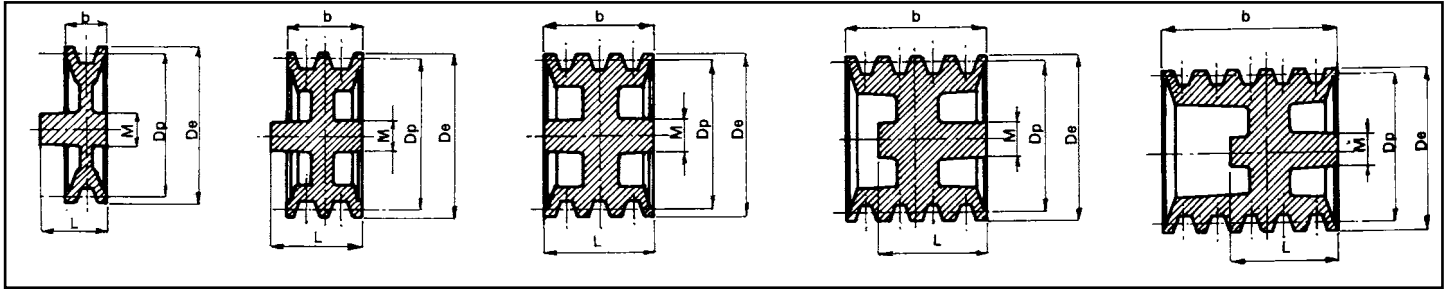

Profile B

PART NO.	P.D. DIA.	GROOVES	TYPE	M	L
1B20 AL	1.97	1	1	1 7/16	1 9/16
1B24 AL	2.36	1	1	1 7/16	1 9/16
1B27 AL	2.76	1	1	1 5/8	1 9/16
1B32 AL	3.15	1	2	1 3/4	1 9/16
1B36 AL	3.54	1	2	1 3/4	1 9/16
1B40 AL	3.94	1	2	1 7/8	1 9/16
1B43 AL	4.33	1	2	1 7/8	1 9/16
1B44 AL	4.41	1	2	1 7/8	1 9/16
1B48 AL	4.72	1	2	1 15/16	1 9/16
1B52 AL	5.12	1	2	1 15/16	1 9/16
1B55 AL	5.51	1	2	1 15/16	1 9/16
1B60 AL	5.91	1	3	2 3/16	1 9/16
1B63 AL	6.30	1	3	2 3/16	1 9/16
1B67 AL	6.69	1	3	2 1/4	1 9/16
1B70 AL	7.09	1	3	2 3/8	1 9/16
1B75 AL	7.48	1	3	2 3/8	1 9/16
1B80 AL	7.87	1	3	2 7/16	1 9/16
1B82 AL	8.27	1	3	2 7/16	1 9/16
1B86 AL	8.66	1	3	2 7/16	1 9/16
1B90 AL	9.06	1	4	2 7/16	1 9/16
1B95 AL	9.45	1	4	2 9/16	1 9/16
1B98 AL	9.84	1	4	2 9/16	1 9/16
1B110 AL	11.02	1	4		
1B118 AL	11.81	1	4	3 1/8	1 9/16
1B125 AL	12.60	1	4	2 13/16	1 9/16
1B138 AL	13.78	1	5	2 15/16	1 9/16
1B158 AL	15.75	1	5	3 1/8	1 9/16
1B178 AL	17.72	1	5	3 3/8	1 9/16
1B197 AL	19.69	1	5	3 1/8	1 9/16
2B20 AL	1.97	2	1	3 4/8	1 13/16
2B24 AL	2.36	2	1	4 1/8	1 13/16
2B27 AL	2.76	2	1	2 4/8	1 13/16
2B32 AL	3.15	2	2	1 3/4	1 13/16
2B36 AL	3.54	2	2	2 5/8	1 13/16
2B40 AL	3.94	2	2	2 3/16	1 13/16
2B43 AL	4.33	2	2	2 3/16	1 13/16
2B48 AL	4.72	2	2	2 3/16	1 13/16
2B52 AL	5.12	2	2	3 4/8	1 13/16
2B55 AL	5.51	2	2	2 5/16	1 13/16
2B60 AL	5.91	2	3	2 5/16	1 13/16
2B63 AL	6.30	2	3	2 7/16	1 13/16
2B67 AL	6.69	2	3	3 6/8	1 13/16

PART NO.	P.D. DIA.	GROOVES	TYPE	M	L
2B70 AL	7.09	2	3	4 1/8	1 13/16
2B75 AL	7.48	2	3	2 5/8	1 13/16
2B80 AL	7.87	2	3	2 11/16	1 13/16
2B82 AL	8.27	2	3	2 13/16	1 13/16
2B86 AL	8.66	2	3	2 13/16	1 13/16
2B90 AL	9.06	2	4	2 13/16	1 13/16
2B95 AL	9.45	2	4	2 13/16	1 13/16
2B98 AL	9.84	2	4	2 13/16	1 13/16
2B110 AL	11.02	2	4	2 13/16	1 13/16
2B118 AL	11.81	2	4	2 15/16	1 13/16
2B125 AL	12.60	2	4	2 15/16	1 13/16
2B138 AL	13.78	2	5	2 15/16	1 13/16
2B158 AL	15.75	2	5	3 1/8	1 13/16
2B178 AL	17.72	2	5	3 3/8	1 13/16
2B197 AL	19.69	2	5	3 3/4	1 13/16
3B20 AL	2.36	3	2	1 5/8	2 5/8
3B24 AL	2.76	3	2	1 5/8	2 5/8
3B27 AL	3.15	3	2	1 3/4	2 5/8
3B32 AL	3.54	3	2	1 3/4	2 5/8
3B36 AL	3.94	3	2	3 4/8	2 5/8
3B40 AL	4.33	3	2	2 3/16	2 5/8
3B43 AL	4.72	3	2	2 3/8	2 5/8
3B48 AL	5.12	3	2	3 6/8	2 5/8
3B52 AL	5.51	3	2	2 7/16	2 5/8
3B55 AL	5.91	3	2	2 7/16	2 5/8
3B60 AL	6.30	3	2	2 7/16	2 5/8
3B63 AL	6.50	3	3	2 7/16	2 5/8
3B67 AL	6.69	3	3	2 2/4	2 5/8
3B70 AL	7.09	3	3	2 2/4	2 5/8
3B75 AL	7.48	3	3	2 2/4	2 5/8
3B80 AL	7.87	3	3	2 11/16	2 5/8
3B82 AL	8.27	3	3	2 13/16	2 5/8
3B86 AL	8.66	3	3	2 13/16	2 5/8
3B90 AL	9.06	3	4	2 13/16	2 5/8
3B95 AL	9.45	3	4	2 13/16	2 5/8
3B98 AL	9.84	3	4	3	2 5/8
3B110 AL	11.02	3	4	3	2 5/8
3B118 AL	11.81	3	4	3 1/8	2 5/8
3B125 AL	12.60	3	4	3 1/8	2 5/8
3B138 AL	13.78	3	5	3 1/8	2 5/8
3B158 AL	15.75	3	5	3 1/8	2 5/8
3B178 AL	17.72	3	5	3 3/8	2 5/8
3B197 AL	19.69	3	5	3 3/8	2 5/8

Ordering Example:

1B20 AL
1B = 1B Profile
20 = Pitch Dia.
AL = Aluminum




American Metric® Corporation

GROUP: 133

1-133-041214

American Standard ANSI (Inch) MPB V-Belt Sheaves Aluminum

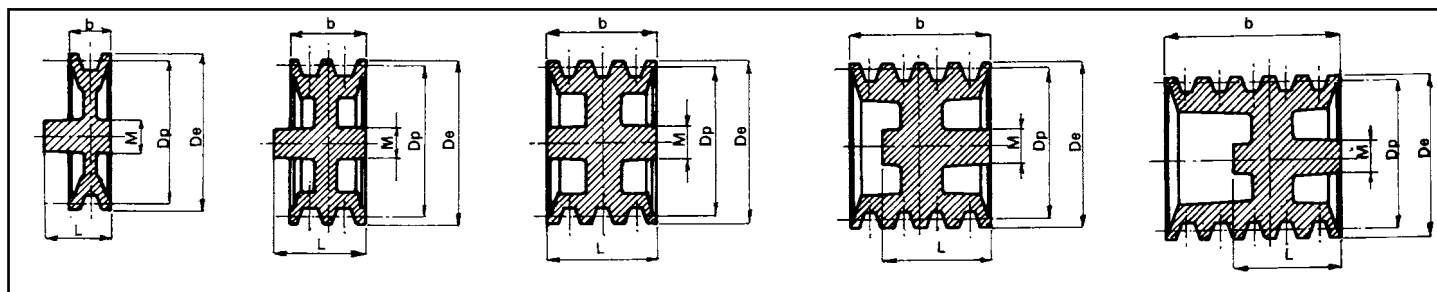

Profile B

PART NO.	P.D. DIA.	GROOVES	TYPE	M	L
4B32 AL	3.15	4	2	2 1/4	3 7/16
4B36 AL	3.54	4	2	1 13/16	3 1/8
4B40 AL	3.94	4	2	2 3/16	2 11/16
4B43 AL	4.33	4	2	2 3/8	2 5/8
4B48 AL	4.72	4	2	2 7/16	2 5/8
4B52 AL	5.12	4	2	2 2/4	2 5/8
4B55 AL	5.51	4	2	2 5/8	2 5/8
4B60 AL	5.91	4	2	2 5/8	2 5/8
4B63 AL	6.30	4	2	2 3/4	2 5/8
4B67 AL	6.69	4	2	2 3/4	2 5/8
4B70 AL	7.09	4	3	2 3/4	2 5/8
4B75 AL	7.48	4	3	2 3/4	2 5/8
4B80 AL	7.87	4	3	2 3/4	2 5/8
4B82 AL	8.27	4	3	2 13/16	2 5/8
4B86 AL	8.66	4	3	2 13/16	2 5/8
4B90 AL	9.06	4	4	2 15/16	2 5/8
4B95 AL	9.45	4	4	2 15/16	2 5/8
4B98 AL	9.84	4	4	3 1/8	2 5/8
4B110 AL	11.02	4	4	3 1/8	2 5/8
4B118 AL	11.81	4	4	3 1/4	2 5/8
4B125 AL	12.60	4	4	3 5/16	2 5/8
4B138 AL	13.78	4	5	3 5/16	2 5/8
4B158 AL	15.75	4	5	3 7/16	2 5/8
4B178 AL	17.72	4	5	3 3/8	2 5/8
4B197 AL	19.69	4	5	3 3/8	2 5/8

PART NO.	P.D. DIA.	GROOVES	TYPE	M	L
5B40 AL	3.94	5	2	2 3/16	3 1/4
5B43 AL	4.33	5	2	2 3/8	3 1/4
5B48 AL	4.72	5	2	2 2/4	2 7/8
5B52 AL	5.12	5	2	2 2/4	2 7/8
5B55 AL	5.51	5	2	2 13/16	2 7/8
5B60 AL	5.91	5	2	2 13/16	2 7/8
5B63 AL	6.30	5	2	2 13/16	2 7/8
5B67 AL	6.69	5	2	2 13/16	2 7/8
5B70 AL	7.09	5	2	2 7/8	2 7/8
5B75 AL	7.48	5	3	2 15/16	2 7/8
5B80 AL	7.87	5	3	2 15/16	2 7/8
5B82 AL	8.27	5	3	3 1/8	2 7/8
5B86 AL	8.66	5	3	3 1/8	2 7/8
5B90 AL	9.06	5	4	3 1/8	2 7/8
5B95 AL	9.45	5	4	3 1/8	2 7/8
5B98 AL	9.84	5	4	3 1/8	2 7/8
5B110 AL	11.02	5	4	3 1/8	2 7/8
5B118 AL	11.81	5	4	3 1/4	2 7/8
5B125 AL	12.60	5	4	3 3/8	2 7/8
5B138 AL	13.78	5	5	3 3/8	2 7/8
5B158 AL	15.75	5	5	3 9/16	2 7/8
5B178 AL	17.72	5	5	3 15/16	2 7/8
5B197 AL	19.69	5	5	3 15/16	2 7/8

Ordering Example:

4B32 AL
4B = 4B Profile
32 = Pitch Dia.
AL = Aluminum