


AT Pulleys, Pitch 10mm for Taper Bushes

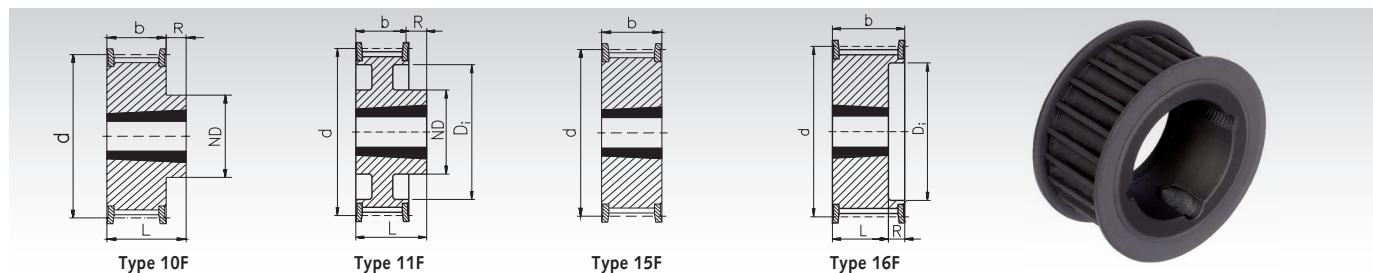

Material: Steel, phosphated.

These steel pulleys offer a much higher wear resistance than standard parts from aluminium. The ready-to-install taper version enables a quick mounting and a fatigue-resistant shaft-to-hub connection.

Ordering Details: e.g.: Product No. **1-006-40AT10TL18, Taper Pulley AT 10, 18 Teeth, Timing Belt Width 25 mm**

Profile AT10, Timing Belt Width 25 mm

Product No. 25mm	Number of teeth	Type	Outside Ø		d mm	ND mm	Di mm	b mm	L mm	R mm	Taper Bush Type Page 340	Bore Ø		Weight g
			Pulley mm	Flange mm								min. mm	max. mm	
40AT10TL18.1008	18	16F	55,45	60	57,30	-	37	30	30	8	1008	9	25	356
40AT10TL19.1108	19	16F	58,65	66	60,48	-	44	30	30	8	1108	9	28	397
40AT10TL20.1108	20	16F	61,80	66	63,66	-	44	30	30	8	1108	9	28	440
40AT10TL22.1108	22	16F	68,20	75	70,03	-	50	30	30	8	1108	9	28	532
40AT10TL24.1108	24	16F	74,55	83	76,39	-	58	30	30	8	1108	9	28	633
40AT10TL25.1108	25	16F	77,75	83	79,58	-	58	30	30	8	1108	9	28	687
40AT10TL26.1610	26	16F	80,90	87	82,76	-	63	30	30	5	1610	12	42	742
40AT10TL27.1610	27	16F	84,10	91	85,94	-	64	30	30	5	1610	12	42	800
40AT10TL28.1610	28	16F	87,25	93	89,13	-	66	30	30	5	1610	12	42	860
40AT10TL30.1610	30	16F	93,65	97	95,49	-	68	30	30	5	1610	12	42	988
40AT10TL32.1610	32	16F	100,00	106	101,86	-	76	30	30	5	1610	12	42	1123
40AT10TL36.2012	36	10F	112,75	119	114,59	92	-	30	32	2	2012	12	50	1503
40AT10TL40.2012	40	10F	125,45	131	127,32	96	-	30	32	2	2012	12	50	1854
40AT10TL44.2012	44	10F	138,20	143	140,06	110	-	30	32	2	2012	12	50	2244
40AT10TL48.2012	48	10F	150,95	158	152,79	110	-	30	32	2	2012	12	50	2670
40AT10TL60.2012	60	11F	189,10	200	190,99	110	158	30	32	2	2012	12	50	4168


Profile AT10, Timing Belt Width 32 mm

Product No. 32mm	Number of teeth	Type	Outside Ø		d mm	ND mm	Di mm	b mm	L mm	R mm	Taper Bush Type Page 340	Bore Ø		Weight g
			Pulley mm	Flange mm								min. mm	max. mm	
47AT10TL18.1008	18	16F	55,45	60	57,30	-	37	38	38	16	1008	9	25	438
47AT10TL19.1108	19	16F	58,65	66	60,48	-	44	38	38	16	1108	9	28	488
47AT10TL20.1108	20	16F	61,80	66	63,66	-	44	38	38	16	1108	9	28	540
47AT10TL22.1210	22	16F	68,20	75	70,03	-	50	38	38	13	1210	10	32	654
47AT10TL24.1615	24	15F	74,55	83	76,39	-	-	38	38	-	1615	12	42	777
47AT10TL25.1615	25	15F	77,75	83	79,58	-	-	38	38	-	1615	12	42	844
47AT10TL26.1615	26	15F	80,90	87	82,76	-	-	38	38	-	1615	12	42	912
47AT10TL27.1615	27	15F	84,10	91	85,94	-	-	38	38	-	1615	12	42	983
47AT10TL28.1615	28	15F	87,25	93	89,13	-	-	38	38	-	1615	12	42	1057
47AT10TL30.1615	30	15F	93,65	97	95,49	-	-	38	38	-	1615	12	42	1214
47AT10TL32.1615	32	15F	100,00	106	101,86	-	-	38	38	-	1615	12	42	1380
47AT10TL36.2012	36	16F	112,75	119	114,59	-	86	38	38	6	2012	12	50	1747
47AT10TL40.2012	40	16F	125,45	131	127,32	-	90	38	38	6	2012	12	50	2155
47AT10TL44.2012	44	16F	138,20	143	140,06	-	110	38	38	6	2012	12	50	2607
47AT10TL48.2517	48	10F	150,95	158	152,79	125	-	38	45	7	2517	15	65	3608
47AT10TL60.2517	60	11F	189,10	200	190,99	125	158	38	45	7	2517	15	65	5633


Note: 2517 Taper Lock Bushings Have BSW Threads

These Taper-Lock bushes are used for easy and fast mounting of driving elements in Taper version. They can be used with and without key.

The bushings are available with various outer dimensions. For every outside diameter there are bushes with many different bores available. This mounting method is cost-efficient and fast, and suitable for rather high torques.

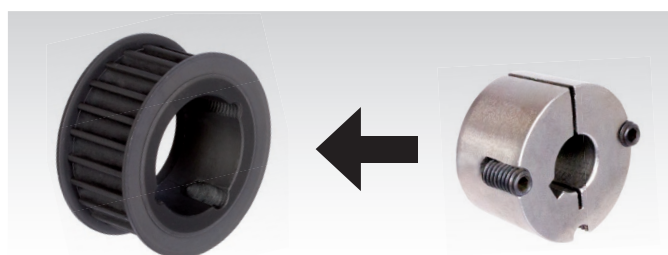

T Pulleys, Pitch 10mm for Taper Bushes

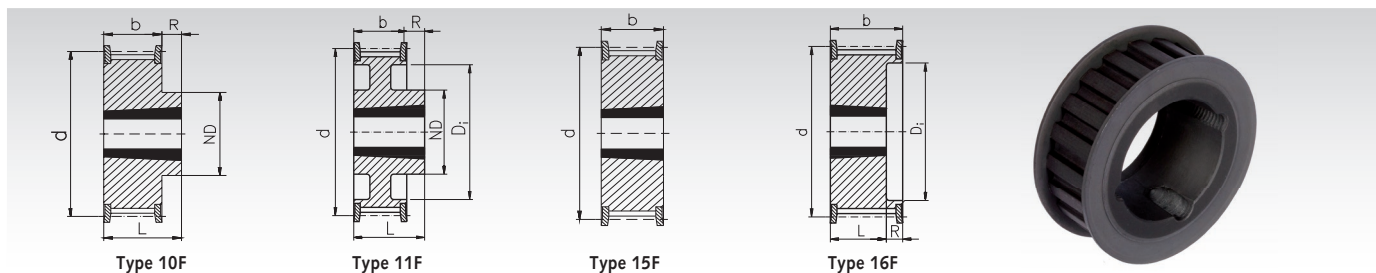

Material: Steel, phosphated.

These steel pulleys offer a much higher wear resistance than standard parts from aluminium. The ready-to-install taper version enables a quick mounting and a fatigue-resistant shaft-to-hub connection.

Ordering Details: e.g.: Product No. 1-006-40T10TL18, Taper Pulley T 10, 18 Teeth, Timing Belt Width 25 mm

Profile T10, Timing Belt Width 25 mm

Product No. 25mm	Number of teeth	Type	Outside Ø		d mm	ND mm	Di mm	b mm	L mm	R mm	Taper Bush Type Page 340	Bore Ø		Weight g
			Pulley mm	Flange mm								min. mm	max. mm	
40T10TL18.1008	18	16F	55,45	60	57,30	-	37	30	30	8	1008	9	25	356
40T10TL19.1108	19	16F	58,65	66	60,48	-	44	30	30	8	1108	9	28	397
40T10TL20.1108	20	16F	61,80	66	63,66	-	44	30	30	8	1108	9	28	440
40T10TL22.1108	22	16F	68,20	75	70,03	-	50	30	30	8	1108	9	28	532
40T10TL24.1108	24	16F	74,55	83	76,39	-	58	30	30	8	1108	9	28	633
40T10TL25.1108	25	16F	77,75	83	79,58	-	58	30	30	8	1108	9	28	687
40T10TL26.1610	26	16F	80,90	87	82,76	-	63	30	30	5	1610	12	42	742
40T10TL27.1610	27	16F	84,10	91	85,94	-	64	30	30	5	1610	12	42	800
40T10TL28.1610	28	16F	87,25	93	89,13	-	66	30	30	5	1610	12	42	860
40T10TL30.1610	30	16F	93,65	97	95,49	-	68	30	30	5	1610	12	42	988
40T10TL32.1610	32	16F	100,00	106	101,86	-	76	30	30	5	1610	12	42	1123
40T10TL36.2012	36	10F	112,75	119	114,59	92	-	30	32	2	2012	12	50	1503
40T10TL40.2012	40	10F	125,45	131	127,32	96	-	30	32	2	2012	12	50	1854
40T10TL44.2012	44	10F	138,20	143	140,06	110	-	30	32	2	2012	12	50	2244
40T10TL48.2012	48	10F	150,95	158	152,79	110	-	30	32	2	2012	12	50	2670
40T10TL60.2012	60	11F	189,10	200	190,99	110	158	30	32	2	2012	12	50	4168

Profile T10, Timing Belt Width 32 mm

Product No. 32mm	Number of teeth	Type	Outside Ø		d mm	ND mm	Di mm	b mm	L mm	R mm	Taper Bush Type Page 340	Bore Ø		Weight g
			Pulley mm	Flange mm								min. mm	max. mm	
47T10TL18.1008	18	16F	55,45	60	57,30	-	37	38	38	16	1008	9	25	438
47T10TL19.1108	19	16F	58,65	66	60,48	-	44	38	38	16	1108	9	28	488
47T10TL20.1108	20	16F	61,80	66	63,66	-	44	38	38	16	1108	9	28	540
47T10TL22.1210	22	16F	68,20	75	70,03	-	50	38	38	13	1210	10	32	654
47T10TL24.1615	24	15F	74,55	83	76,39	-	-	38	38	-	1615	12	42	777
47T10TL25.1615	25	15F	77,75	83	79,58	-	-	38	38	-	1615	12	42	844
47T10TL26.1615	26	15F	80,90	87	82,76	-	-	38	38	-	1615	12	42	912
47T10TL27.1615	27	15F	84,10	91	85,94	-	-	38	38	-	1615	12	42	983
47T10TL28.1615	28	15F	87,25	93	89,13	-	-	38	38	-	1615	12	42	1057
47T10TL30.1615	30	15F	93,65	97	95,49	-	-	38	38	-	1615	12	42	1214
47T10TL32.1615	32	15F	100,00	106	101,86	-	-	38	38	-	1615	12	42	1380
47T10TL36.2012	36	16F	112,75	119	114,59	-	86	38	38	6	2012	12	50	1747
47T10TL40.2012	40	16F	125,45	131	127,32	-	90	38	38	6	2012	12	50	2155
47T10TL44.2012	44	16F	138,20	143	140,06	-	110	38	38	6	2012	12	50	2607
47T10TL48.2517	48	10F	150,95	158	152,79	125	-	38	45	7	2517	15	65	3608
47T10TL60.2517	60	11F	189,10	200	190,99	125	158	38	45	7	2517	15	65	5633

Note: 2517 Taper Lock Bushings Have BSW Threads

These Taper-Lock bushes are used for easy and fast mounting of driving elements in Taper version. They can be used with and without key. The bushings are available with various outer dimensions. For every outside diameter there are bushes with many different bores available. This mounting method is cost-efficient and fast, and suitable for rather high torques.

