
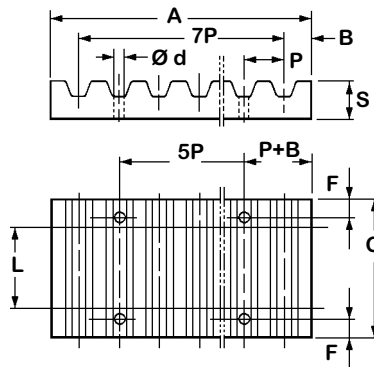
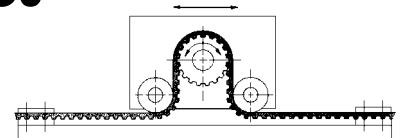


Timing Belt Clamping Plates

Material: Aluminum

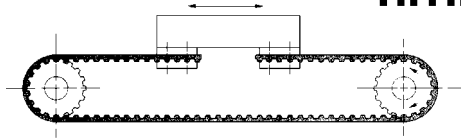


American (Imperial) Pitch Clamp

Pitch	F	Ø d	B	A	S	L (belt width) C (clamp width)				
						025	037	050	075	100
XL	6	5.5	3.5	42.5	8	25.5	28.5	39	45	51.5
L	8	9	5	76.6	15			45	51	57.5
H	10	11	9	106.9	22					

Metric Pitch Clamp

Pitch	F	Ø d	B	A	S	L (belt width) C (clamp width)				
						10	16	25	32	50
T5	6	5.5	3.2	41.8	8	29	35	44		
T10	8	9	5	80	15		41	50	57	75
AT5	6	5.5	3.2	41.8	8	29	35	44		
AT10	8	9	5	80	15		41	50	57	75

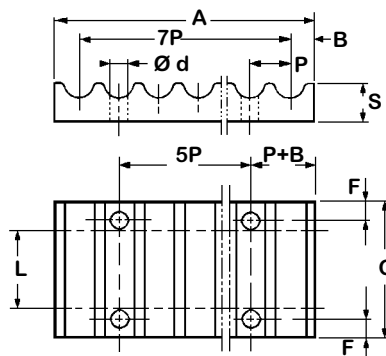

HTD® / Super Torque Pitch Clamp (Interchangeable for either belt profile)

Pitch	F	Ø d	B	A	S	L (belt width) C (clamp width)											
						09	15	20	25	30	40	50	55	85	100	115	170
5M / S5M	6	5.5	3.2	41.8	8	28	34		44								
8M / S8M	8	9	5	66	15		40	45		55		75		110			
14M / S14M	10	11	9	116	22						71		86	116	131	146	201

ALSO PRODUCED TO CUSTOMER DRAWINGS

Long Length Clamping Plates (maximum length 4 m)



American Metric® Corporation