


Metric Synchronous Belts


POLYURETHANE WITH STEEL CORDS*

T20 AT (20 mm Pitch, AT Profile)

Type	Belt Length (mm)	No. Teeth
20A1000	1000	50
20A1100	1100	55
20A1200	1200	60
20A1260	1260	63
20A1500	1500	75
20A1600	1600	80
20A1700	1700	85
20A1760	1760	88
20A1800	1800	90
20A1900	1900	95
20A1960	1960	98

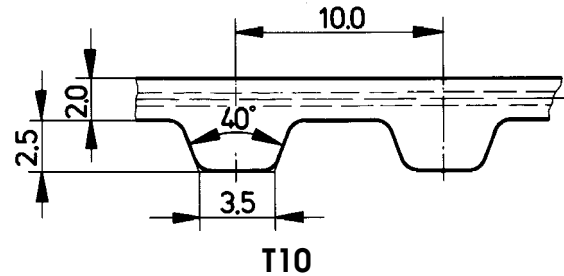

COMPARISON BETWEEN STANDARD AND "AT" PROFILES

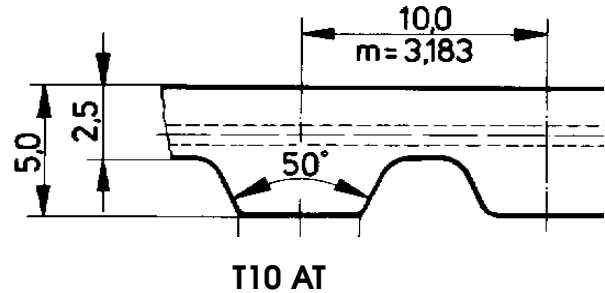

Standard Belt Width (mm)	6	7	8	10	11	12	14	16	20	25	32	50	60	75	100
--------------------------	---	---	---	----	----	----	----	----	----	----	----	----	----	----	-----

Ordering Example:

20A1000.6
 20A----- Pitch
 1000----- Length (mm)
 6----- Width (mm)

*Kevlar material available upon request.

Note: Very narrow belts, such as 4 mm or 6 mm, have a reduced number of steel cords and are only suitable for light loads. Special wire configurations for narrow widths are available by special quote.