


# Metric Hollow Pin Chain


## Form 1

With Bushing  
Without Roller

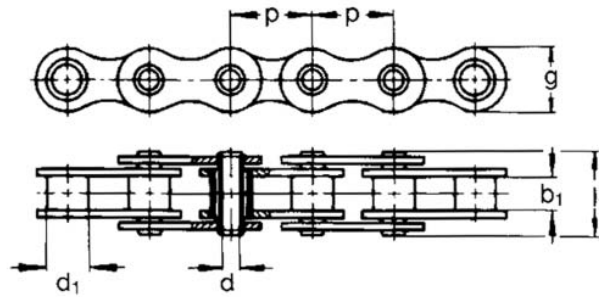


## Form 2

With Roller  
Without Bushing

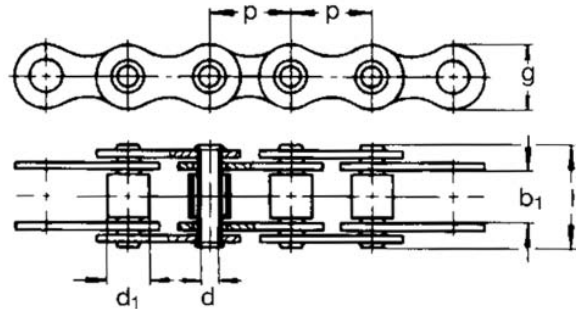

## Form 3

Roller Diameter  
Exceeding The  
Plate Height

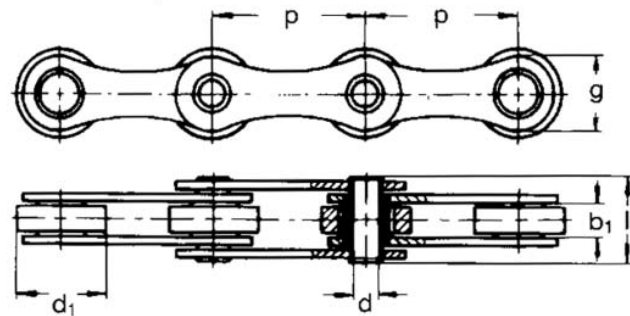

Ametric® Chain No.	ISO No.	Pitch p mm	Between Inner Plate b <sub>1</sub>	Roller Diameter d <sub>1</sub>	Overall Width l	Overall Max. g	Pin Bore d	Weight kg/m	Breaking Strength N	Form
813.1	08B-1	12.70	3.3	7.75	10.2	10.5	4.2	0.34	10,000	2
813.2		12.70	9.5	8.51	19.0	11.8	4.0	0.68	14,000	2
813.3		12.70	7.75	8.51	17.0	12.2	4.5	0.65	10,000	1
813.4		12.70	7.85	8.51	16.4	-	4.5	0.64	13,500	2
816.1	10B-1	15.88	6.5	10.16	17.0	14.7	5.0	0.74	15,000	2
816.2		15.88	9.5	10.16	20.0	14.7	5.0	0.83	15,000	2
816.3		15.88	9.65	10.16	20.0	-	5.18	0.87	13,500	3
819.1	12B-1	19.05	11.68	12.07	22.8	15.9	4.0	1.09	25,000	2
825.1	16B-1	25.40	17.02	15.88	37.6 max	21 max	8.1	2.28	45,000	1
838.1		38.10	15.20	18.00	34.5	28.0	10.2	2.62	45,000	1
850.1		50.00	15.00	26.00	35.6	-	14.4	3.30	50,000	1
850.2		50.00	15.00	26.00	35.6	40.0	14.4	4.10	100,000	1
850.3		50.80	10.0	30.00	27.0	26.0	8.2	2.15	50,000	3
850.3 SS		50.80	10.0	30.00	27.0	26.0	8.2	2.15	32,000	3
899.1		100.00	10.0	30.00	27.0	-	8.2	1.46	45,000	3

SS = Stainless Steel  
R.C.L. = Riveted Connector Link

Sprockets available upon request.



American Metric® Corporation

Group: 005

1-005 - 111118