
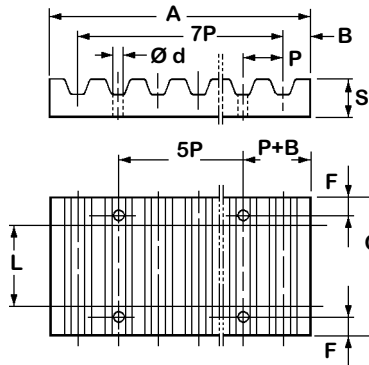
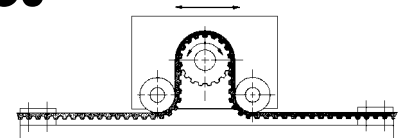


Timing Belt Clamping Plates

Material: Aluminum

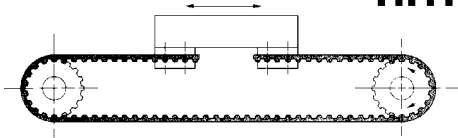


American (Imperial) Pitch Clamp

| Pitch | F | Ø d | B | A | S | L (belt width) | | | | |
|-------|----|-----|-----|-------|----|-----------------|------|-----|-----|------|
| | | | | | | 025 | 037 | 050 | 075 | 100 |
| | | | | | | C (clamp width) | | | | |
| XL | 6 | 5.5 | 3.5 | 42.5 | 8 | 25.5 | 28.5 | | | |
| L | 8 | 9 | 5 | 76.6 | 15 | | | 39 | 45 | 51.5 |
| H | 10 | 11 | 9 | 106.9 | 22 | | | 45 | 51 | 57.5 |

Metric Pitch Clamp

| Pitch | F | Ø d | B | A | S | L (belt width) | | | | |
|-------|---|-----|-----|------|----|-----------------|----|----|----|----|
| | | | | | | 10 | 16 | 25 | 32 | 50 |
| | | | | | | C (clamp width) | | | | |
| T5 | 6 | 5.5 | 3.2 | 41.8 | 8 | 29 | 35 | 44 | | |
| T10 | 8 | 9 | 5 | 80 | 15 | | | 50 | 57 | 75 |
| AT5 | 6 | 5.5 | 3.2 | 41.8 | 8 | 29 | 35 | 44 | | |
| AT10 | 8 | 9 | 5 | 80 | 15 | | | 50 | 57 | 75 |

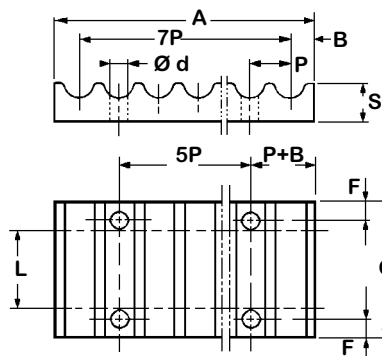

HTD® / Super Torque Pitch Clamp (Interchangeable for either belt profile)

| Pitch | F | Ø d | B | A | S | L (belt width) | | | | | | | | | | | |
|------------|----|-----|-----|------|----|-----------------|----|----|----|----|----|----|----|-----|-----|-----|-----|
| | | | | | | 09 | 15 | 20 | 25 | 30 | 40 | 50 | 55 | 85 | 100 | 115 | 170 |
| | | | | | | C (clamp width) | | | | | | | | | | | |
| 5M / S5M | 6 | 5.5 | 3.2 | 41.8 | 8 | 28 | 34 | | 44 | | | | | | | | |
| 8M / S8M | 8 | 9 | 5 | 66 | 15 | | | 40 | 45 | 55 | | 75 | | 110 | | | |
| 14M / S14M | 10 | 11 | 9 | 116 | 22 | | | | | | 71 | | 86 | 116 | 131 | 146 | 201 |

ALSO PRODUCED TO CUSTOMER DRAWINGS

Long Length Clamping Plates (maximum length 4 m)



American Metric® Corporation