

## Timing Belts Rubber HTD, STD(STS), RPP & D




### Markets/Applications

Suitable for many applications including data storage, hand power tools, postage handling, food processors, office machines, centrifuges, money handling, medical diagnostic, sewing machines, ticket dispensers, robotics, vending machines and vacuum cleaners.

### Features/Advantages

- Fiberglass tensile cord provides high strength, excellent flex life, and high resistance to elongation.
- Neoprene body provides protection against grime, grease, oil and moisture.
- Nylon tooth facing provides a durable wear surface for long service life.
- Thirty percent increase in horsepower ratings, as compared to traditional timing belts.
- Eliminates lubrication and re-tensioning to reduce maintenance and labor required on drives.
- The optimized tooth form permits high loads to be transmitted, even in small pitches.
- Wide speed range.
- Economical operation. No lubrication needed, no need for adjustment due to stretch and wear.
- Compact design.
- Long service life.

► Our available sizes including

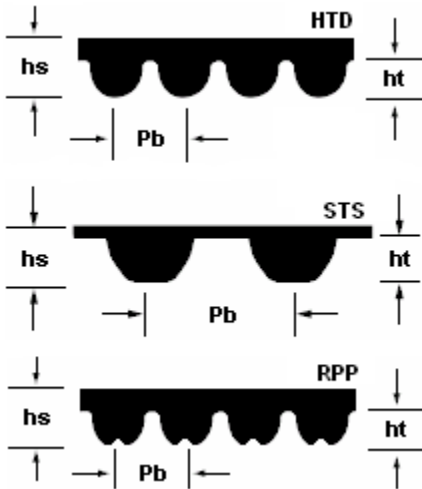

Type	pb (mm)	ht (mm)	hs (mm)
HTD 2M >>	2.0	0.75	1.36
HTD 3M >>	3.0	1.17	2.40
HTD 5M >>	5.0	2.06	3.80
HTD 8M >>	8.0	3.36	6.00
HTD 14M >>	14.0	6.02	10.00
HTD 20M >>	20.0	8.40	13.20